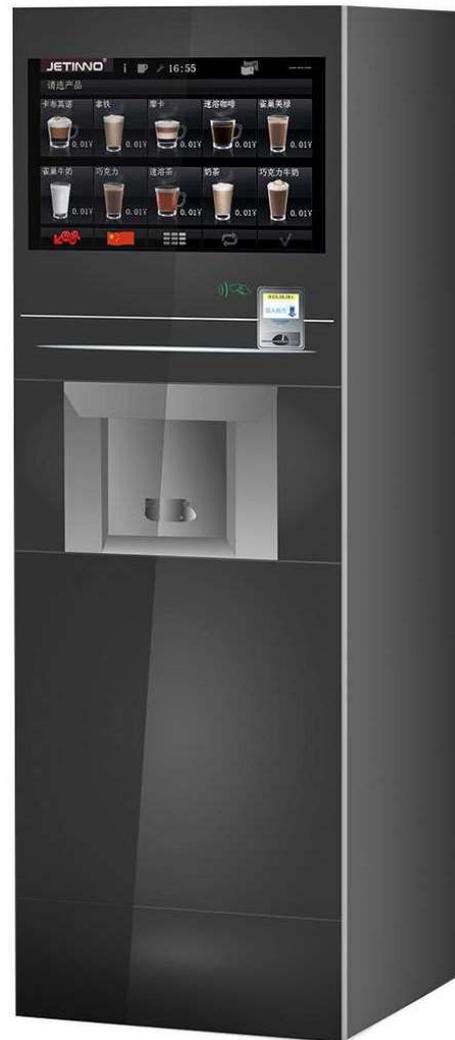JETINNO®

JL500-ES7CP

Free Standing Bean to Cup Coffee Vending Machine

Features

Reliable Performance
User-friendly Interface
High Security and Cost-Effective
Easy for Cleaning
27" Touch Screen Display
Dosage 0-14g is Acceptable for Brewing
High Speed Mixer (Speed Adjustable)

Baverage List

Espresso
Double Espresso
Long Coffee
Americano
Cappuccino
Latte
Mocha
Macciato
Milk Cacao
Cacao
Hot Milk
Hot Water
Instant Coffee
Orange Juice
Apple Juice
......

JL500-ES7CP coffee vending machine is specially designed for free standing vending market, mostly used in public areas like university, hospital, library, shopping mall, factory, railway station, airport etc.

JL500-ES7CP Free Standing Coffee Vending Machine

SPECIFICATIONS

User-Interface

27" Touch Screen LCD Display

Dual Operating system: Linux / Android

Main VMC Application Framework Lib

Full MDB Protocol Support

QT GUI Framework

EVA/DTS Support for Vending Machine

Support 1080p Screen and 1080p Video Play

Support WIFI and 4G Dongle for Back Service Communication

Grinder

Made in Switzerland

EMH64 Professional Version

Flat Steel Disc (Diameter 64mm)

Life Span: 750,000 Portions

Bean Empty Detectable

Espresso Brewer

Jetinno International Patented

2PCs 24V DC Motors, Maximum Totally Current 5A

1PCs PTC Heater is Optional For Warming Up the Brewing Chamber

Dosage: 0~14 grams Ground Coffee

Zero Pollution, Don't Need to Take Out for Normal Cleaning

Brewer Removable for De-scale or Deep Cleaning

No Sensor and No Switch, absolutely No Malfunction

Main Structure is Made By 2mm Stainless Steel

Perfect Coffee Cake and Coffee Creamer

Hydraulic System

Jetinno Patented

700ml Stainless Steel Boiler

Pressure Sensor Design (Always Exact Brewing Pressure)

Gear Pump, Power Adjustable According to Pressure Sensor

Communication

MDB

EVA/DTS

Parameters

Maximum Power: 2700W

Fuse: 15A

Life Span: 125,000 Cycles

Mug Cup Table: 60-110mm

Cups: 500 cups

Instant Drinks Speed: 20s

Espresso Speed: 35s

Optional

Water Pump

Water Chiller

4G Module

Bill Validator

Coin Changer

Mobile Payment

Foot Wheel

Operating Environment

Voltage: 220V-240V AC, 50/60Hz

Temperature: 5^{o} C to 50^{o} C

Humidity: 10% to 95%

Dimensions and Weight

Dimension: 1830mm X 664mm X 700mm (H x W x D)

Weight: approx. 150kg